



MANUAL HYDRAULIC STACKER

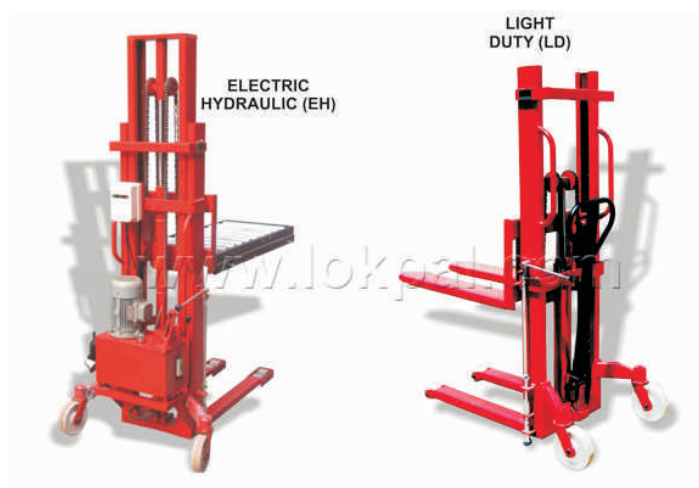

Specifications:

Rigid Stacker

Model	Cap.	MAX. FORK	MAST HT.
	Kg	HT(mm)	MIN (mm)
		A	B
LD-06-11	650	1100	1530
LD-06-13	650	1350	1780
LD-06-16	650	1600	2030
HD-10-11	1000	1100	1530
HD-10-13	1000	1350	1780
HD-10-16	1000	1600	2030

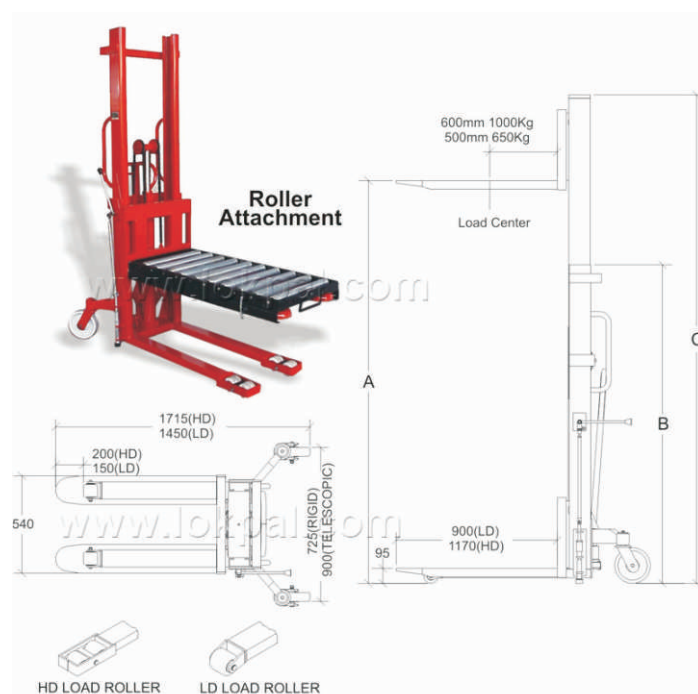

Specifications:

Telescopic Stacker


Model	Cap.	MAX. FORK	MAST HT.	MAST HT.
	Kg	HT (mm)	MIN (mm)	MAX (mm)
		A	B	C
LD-06-20	650	2000	1530	2480
LD-06-25	650	2500	1780	2980
LD-06-30	650	3000	2030	3480
HD-10-20	1000	2000	1530	2480
HD-10-25	1000	2500	1780	2980
HD-10-30	1000	3000	2030	3480

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com

ADJUSTABLE FORK STACKER

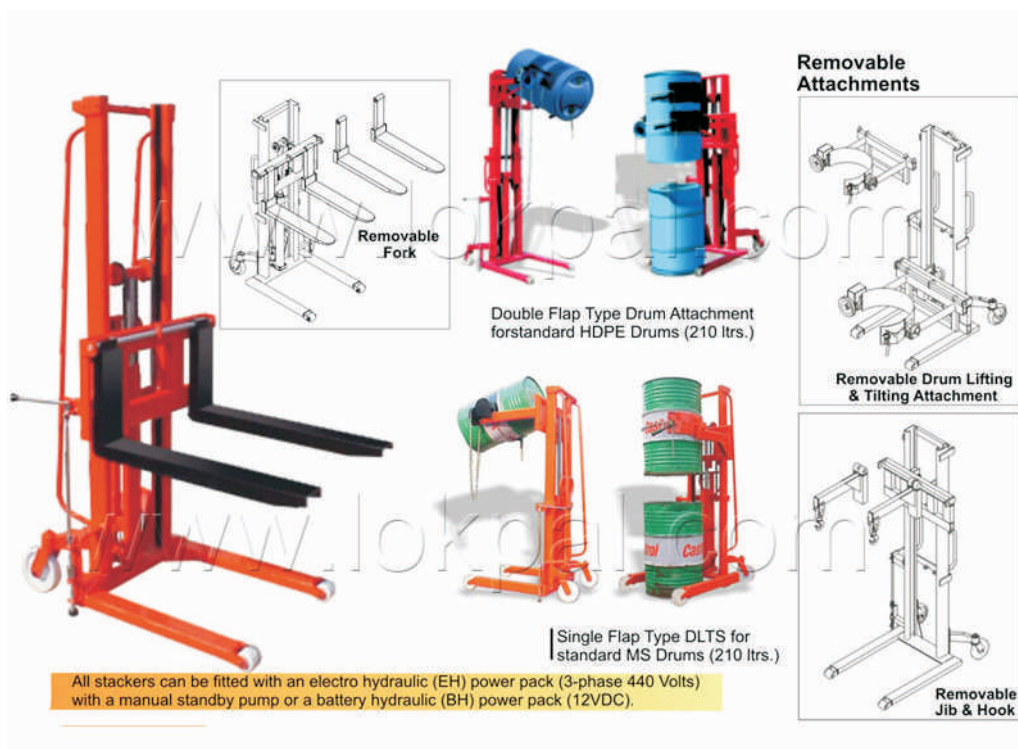

MANUAL STACKER



Hand and foot operated pump for use in tight spaces.

Features

Easy to move fitted with Hard Polymer Wheels
Fully Powdered Coated Body
Rubber Coated Handle
Hand & Foot Operated Pump for use in tight spaces
Fitted with Wheel Brake.



Specifications:

Model	Capacity kg	Lifting	Shifting	Fork Span mm	Fork Length mm	Fork Ht. Min. mm	Fork Ht. Max. mm	Leg Inner mm	Leg Outer mm	Steering Wheel mm	Min. Mast Ht. mm
SYC1.5M-1.6	1500	Manual	Manual	565	1150	90	1600	280	515	150x48	2070
SYC1.5-M3	1500	Manual	Manual	565	1150	90	3000	280	515	150x48	2020
MS-E2016	2000	Manual	Manual	230-855	915	80	1600	425	625	180x50	2120
MS-E1016	1000	Manual	Manual	250-645	900	90	1600	435	615	180x50	2000


*STD-Standerd *ADJ-with Adjustable fork and adjustable legs

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com

SEMI ELECTRIC STACKER

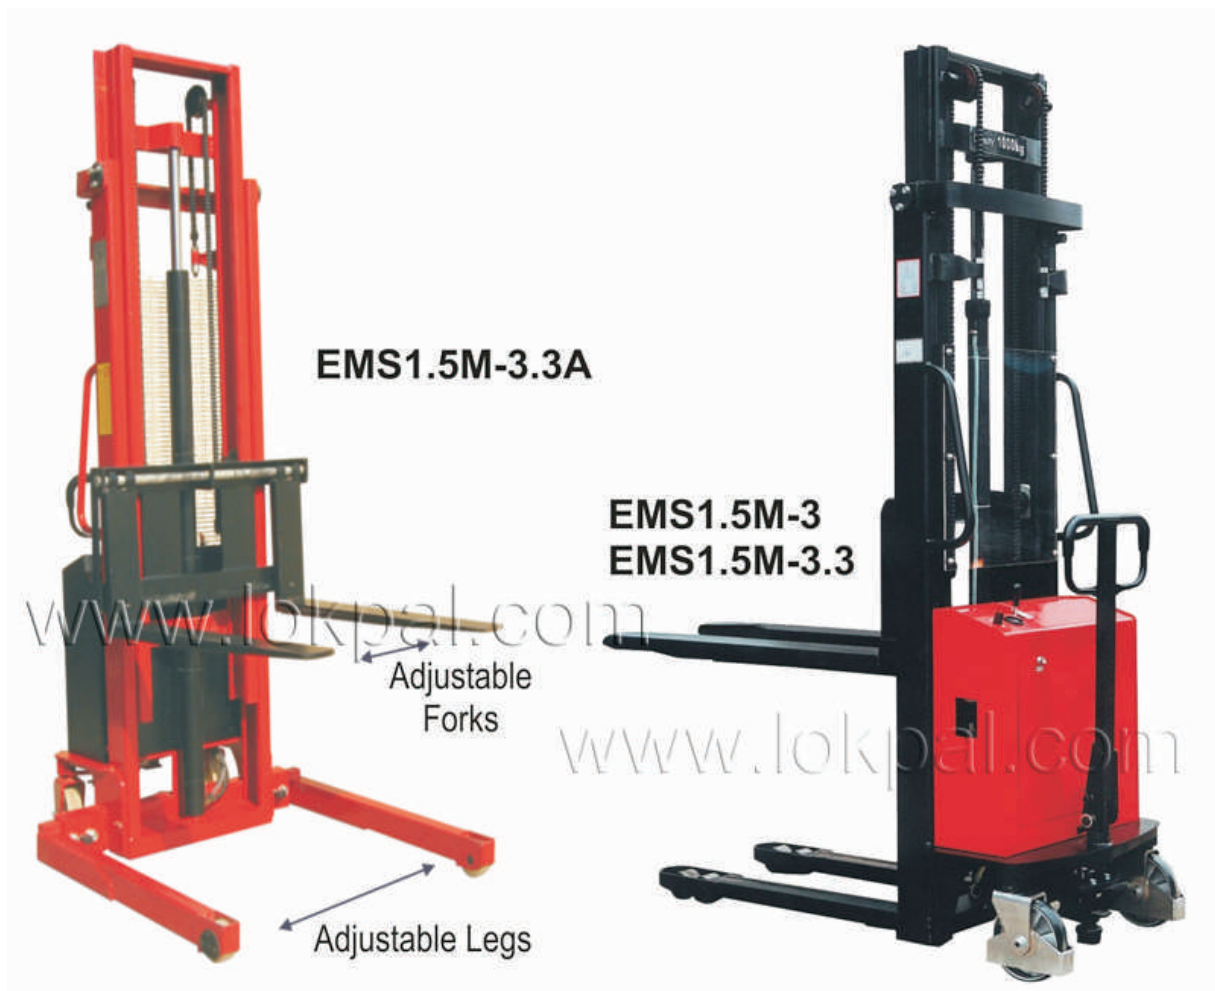

Features

It has Rubber coated handle. Fully Powder coated body.
Hard chrome plated piston.
Single piece pump.
With Hard Polymer Wheels.
Export Model / CE Stamped.

Specifications:

Model	Capacity kg	Lifting	Shifting	Fork Span mm	Fork Length mm	Fork Ht. Min. mm	Fork Ht. Max. mm	Leg Inner Mm	Leg Outer mm	Steering Wheel mm	Min. Mast Ht. mm
EMS 1.5M-3	1500	Battery	Manual	565	1150	90	3000	280	515	200x50	2020
EMS 1.5M-3.3	1500	Battery	Manual	565	1150	90	3300	280	515	200x50	2170
EMS 1.5M-3.3A	1500	Battery	Manual	230-800	1150	80	3300	960-1240	1080-1360	200x50	2170

*STD-Standerd *ADJ-with Adjustable fork and adjustable legs

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com

FULL ELECTRIC STACKER

VH-PWS 100/30FF
VH-PWS 100/30AA
(ADJ Leg & Fork)

FE 1533

FK 1545

Free Lift
1500mm

Features

Fully Powdered Coated Body.
Compact design, strong & robust steel construction.
Top Quality Hydraulic Pump & Cylinder.

Specifications:

	Capacity	Fork	Fork	Min.	Max.	Min.	Extended	Battery	Overall size
Model		Span	Length	Fork Ht.	Fork ht.	Mast Ht.	Mast Ht.		
	Kg	mm	mm	mm	mm	mm	mm	V	mm
VH-PWS100/30FF	1000	680	1070	80	3000	2080	3450	24	1720x780x2080
VH-PWS100/30AA	1000	220-680	1070	50	3000	2090	3460	24	1760x1170x2090
FE-1533	1500	540	1150	90	3300	2225	3830	24	204x1080x2255
FK-1545	1500	560	1150	90	4500	2175	5100	24	2040x1080x2175

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com

WINCH STACKER



Features

Occupy less Space.

Can move through narrow passages.

Can be provided with Plain Platform attachment. Also on demand.

Specifications:

Model		WSL 25	WSL 50
Capacity	Kg	250	500
Fork Span	mm	160-690	160-690
Fork Length	mm	800	900
Min. Fork Height	mm	90	90
Max. Fork Height	mm	1600	1600
Load Centre	mm	400	450
Overall Height	mm	2050	2050

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com

REEL STACKER



All stackers can be fitted with an electro hydraulic (EH) power pack (3-phase 440 Volts) with a manual standby pump or a battery hydraulic (BH) power pack (12VDC).

Features

Compact design, strong and Robust steel construction.

Heavy duty twin chains for better load stability.

Top quality hydraulic pump and cylinder.

Built in top of stroke bypass valve.

Neutral valve allows the operator to manoeuvre the equipment safely and effortlessly.

Hydraulic regulator for automatic lowering speed control.

All stackers are fitted with large diameter 8" steering wheels.

Specifications: Rigid Reel Stacker

MODEL	Cap.	MAX. FORK	MAST HT.
	Kg	HT (mm)	MIN (mm)
		A	B
RL-10-11	1000	1100	1530
RL-10-13	1000	1350	1780
RL-10-16	1000	1600	2030

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75


Website: www.lokpal.com | E-mail: info@lokpal.com

ORDER PICKER OP+TT LIFT




OP-05-16
OP-05-20
OP-05-25
OP-05-30

ORDER PICKER (OP Model)

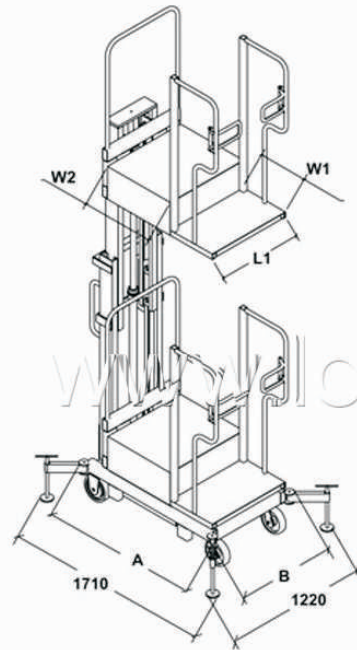

ORDER PICKER (OP Model)

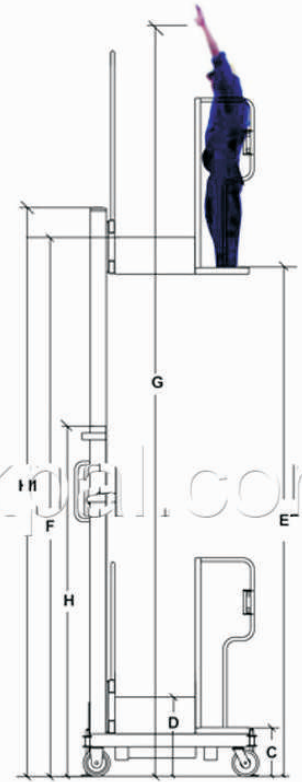

Features

Useful in storage area.
Can pass through narrow aisle.
Available in variable heights.

Specifications:

Model	Cap. Kg	Platform Height		Worktable Height		Mast Height		Overall Lenght	Overall Width	Platform Size	Worktable Size	Working Height
		Min. (C)	Max. (E)	Min. (D)	Max. (F)	Min. (H)	Max. (H1)					
		mm	mm	mm	mm	mm	mm					
OP-05-16	500	325	1800	600	2100	2265	2265	1335	920	700x400	700x600	3500
OP-05-20	500	325	2200	600	2500	1765	2735	1335	920	700x400	700x600	3900
OP-05-25	500	325	2700	600	3000	2015	3035	1335	920	700x400	700x600	4400
OP-05-30	500	325	3200	600	3500	2265	3775	1335	920	700x400	700x600	4900
QLC4.5M	200	220	4280	440	4500	2100	6100			600x640	600x1170	5980

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com

ORDER PICKER LOW HT



Features

Compact size, can be easily moved through narrow aisles.
Powered coated, CE-Stamped.

Specifications:

Modle		WF 200
Capacity (Including operator)	Kg	200
Lowered table height	mm	670
Raised table height	mm	1500
Platform size	mm	600X550
Power unit	w	DC 700
Battery	V-Ah	12-60
Net Weight	Kg	123
Overall size	mm	1040X630X650

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com